



# Residential LFP Battery Series

**LV-BAT-W15.36Ac**

**51.2V 300Ah 15.36kWh**

A sleek and space-saving solution for your energy storage needs. With its compact design and easy installation, it seamlessly blends into any environment. Whether in your home, office, or commercial space, our wall-mounted unit provides reliable and efficient energy storage.



LV-BAT-W15.36Ac is a perfect wall-mounted solar energy lithium battery for residential home use. Built-in with High-Quality LiFePO4 large capacity cells. It ensures a long cycle life of the battery system. The designed BMS is verified to be compatible with different brands of inverters, hybrid on grid&off grid or off grid.

**DONGUAN  
LITHIUM VALLEY  
ENERGY CO., LTD .**

## FEATURES



### Unique Design

New wall mount design



### Flexible Capacity

Max.15pcs in Parallel to extend capacity



### Safe & Reliable

Lithium Iron Phosphate (LFP) Cell



### LED Display

SOC, Battery Status



### Easy Installation


Quick plug in +/- and parallel connection



### Certificates

CB, IEC62619, UL1973, UKCA, CE-EMC, CE-GPSC, EN62619 ; UN38.3, MSDS

# Dimensions

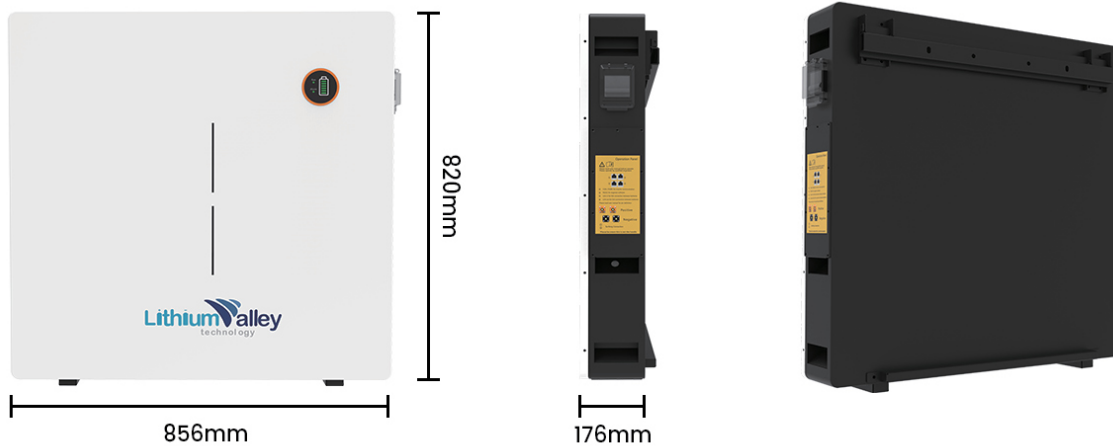

Model	LV-BAT-W15.36Ac
Nominal Voltage	51.2V
Rated Capacity	300Ah
Energy	15360Wh
Charging Cut-off Voltage	56.16V
Discharge Cut-off Voltage	45.6V
Recommend charge/discharge current	100A
Maximum continuous charge/discharge current	200A
Instantaneous discharge current	400A/3S
Charge temperature	0~55°C
Discharge temperature	-20~60°C
Storage Environment (50% state of charge)	20°C ~ 45°C in three months; 25±3°C over three months; Humidity:65±20%RH
Environment	Indoor
Installation	Wall mounted
Cell Technology	Lithium iron phosphate (LiFePO4)
Life Cycle	6000 times @80%DOD
Cooling	Natural convection
Protection Rating	IP65
Certificates	CB, IEC62619, UL1973, UKCA, CE-EMC, CE-GPDS, EN62619 ; UN38.3, MSDS

Dimension and Weight	
Dimension	856*820*176mm
Battery Net Weight	140.7KG

Communication Instruction	
Communication	RS232, CAN, RS485

